

Dryer 2.1

Quick Start Guide



For indoor use only



For humid environments, additional IP68 protection is needed




Regularly check all parts for damage

1 Download the Owner's manual




All information about Enapter devices can be found at handbook.enapter.com.
For support, write to support@enapter.com



2 Make Sure All Pipes and Wires Are Connected

All connection guides can be found in the Owners's manual. Check the correct connection of the device before turning it on.


- ✓ **H2 in port** is connected to the hydrogen output line of your electrolyzers.
- ✓ **H2O out port** is connected to your hydrogen storage.
- ✓ **H2 purge port** is connected to your hydrogen purge outlet.
- ✓ Plug the power cable into **the Power Port**. Make sure the electrical ground is at the top.



Enapter is not responsible for any damage caused by improperly installed equipment.

3

Several Units of EL2.1s and DRY2.1 Can Be Connected Together

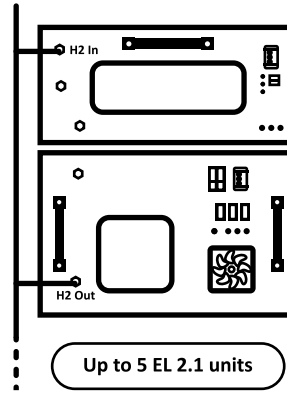

In order to manage the hydrogen purge in a simple way, simply connect as many devices together as needed.

The recommended way to do this is to combine up to five EL2.1s (35 bar version) or two EL2.1s (8 bar version) and one DRY2.1 in a 19" rack and to then connect the purge lines via a common line.

4


Follow the Enapter App Instructions to Connect the Device to Enapter Cloud



To download the app, scan the QR-code with your Android or Apple mobile phone or visit app.enapter.com

- Open the Enapter app and create **an account**.
- Follow the steps to create **a site**.
- Press **the Add device** button.
- Scan QR-code located on the front side of the device.

If you can't scan the QR code, enter the device ID and PIN manually. You can find them in the back of the device.

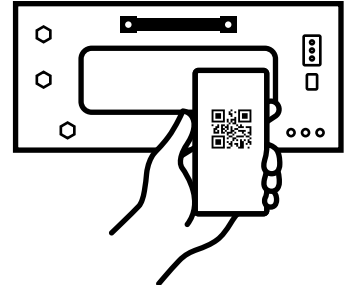

5

Dryer is ready for use!

During normal operation, the LEDs indicate the status of the machine. Visit handbook.enapter.com to learn more. Monitor device activity in **Enapter app** or **Enapter Cloud**.

